


Quick Change Applicator


Crimping Applicator 20.2001



- Mechanical side feed
- Reproducible crimp height adjustment
- Cross sections up to 6 mm²
- Multiple applications
- Simple operation and robust design
- Made for bench top and automated machines

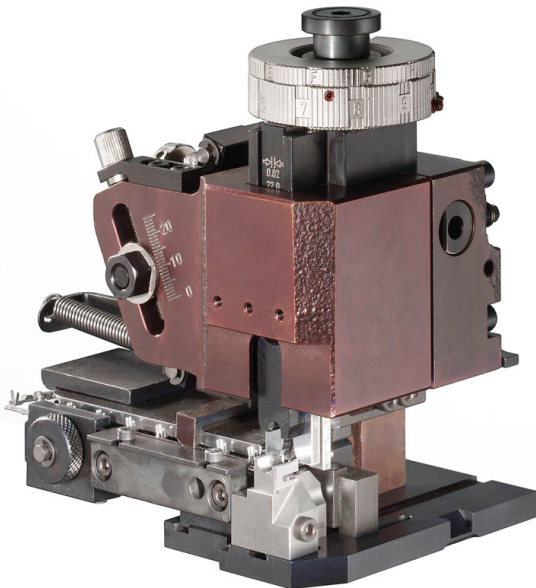

for transverse belted terminals

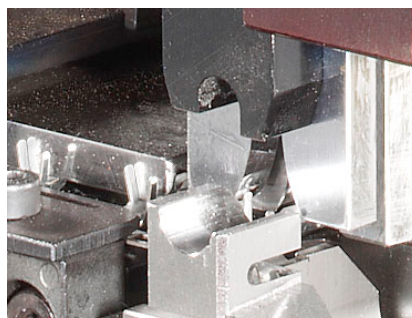


mechanical side feed



crimp height adjustment

Crimping Applicator 20.2001

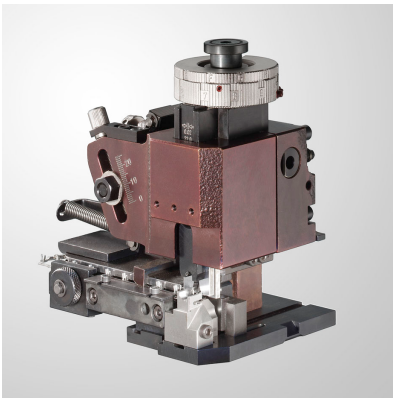

Options

- Wire Crimper
- Insulation Crimper
- Crimp Anvil
- Counter

Description

The crimping applicator 20.2001 with quick change system is made for crimping transversely belted terminals on wires with cross sections up to 6 mm².

This applicator is designed with an indexed rotary head for reproducible, independent crimp height adjustment of both the wire and insulation. With the optional mechanical counter, it is easy to monitor the production run and control the wear parts.

Range of Application

Schaefer crimping applicators are used in the series production of the cable processing industry.

Examples of use

Crimping applicators to connect wires and terminals in multiple applications made for bench top crimp machines and also as equipment for semi or fully automated systems.

Product Combination Possibilities

The applicator 20.2001 can be used in Schaefer crimp machines and if designed accordingly also with Schaefer stripping modules.

Technical Data

Crimping Applicator 20.2001

Processable Wire	
Cross Sections	up to 6 mm ²
Processable Terminals	
Material Thickness	up to 0,8 mm
Terminal Pitch	up to 28 mm
Width of Carrier Strip incl. Belt	6 mm
Terminal Feeding	side feed from left
Actuation	
Feeding	mechanical
Stroke	40 mm
Width of the Crimping Punch	19 mm
Wire Crimp Height Adjustment	
Increments	0,02 mm
Maximum	2 mm
Insulation Crimp Height Adjustment	
Increments	0,02 mm
Maximum	2 mm
Temperature Range	
Operation	15 °C - 40 °C
Storage	0 °C - 60 °C (rF < 80%)
Dimensions & Weight	
L x W x H	170 x 110 x 160 mm [1]
L x W x H incl. Packing	270 x 200 x 270 mm [1]
Weight	4,8 kg [1]
Weight incl. Packing	6,1 kg [1]

[1] approximately in basic configuration

Sales and Service for France



Vario Technologies sarl

43, Rue Louis Robert

91100 Corbeil Essonnes

Phone: +33 970 44 55 26

Fax: +33 173 76 64 62

Email: peter.sandkamp@vario-technologies.com

URL: www.vario-technologies.com

Headquarters



Schäfer Werkzeug- und Sondermaschinenbau GmbH

Dr.-Alfred-Weckesser-Str. 6

76669 Bad Schönborn

Phone: +49 7253 9421-0

Fax: +49 7253 9421-94

Email: info@schaefer.biz

URL: www.schaefer.biz

INNOVATIVE
MASCHINE SOFTWARE



 WireStar²⁰

NEW