



Quick Change Applicator


## Crimping Applicator 23.100

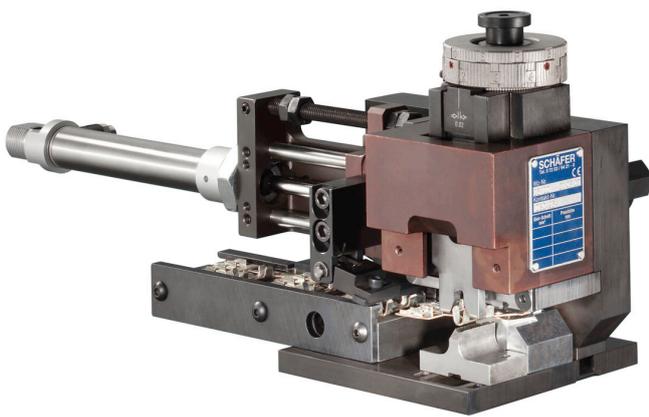

- Pneumactical side feed
- Reproducible crimp height adjustment
- Cross sections up to 25 mm<sup>2</sup>
- Robust design for different applications
- Simple operation
- Made for bench top and automated machines

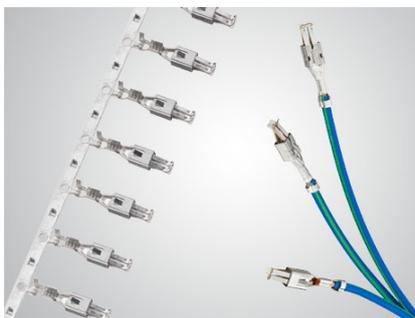

for transverse belted terminals

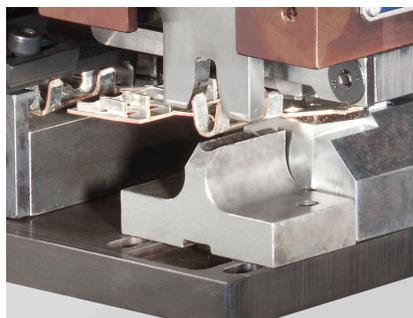

pneumactical side feed



crimp height adjustment

## Crimping Applicator 23.100



### Options

- Wire Crimper
- Insulation Crimper
- Crimp Anvil
- Counter

### Description

The crimping applicator 23.100 with quick change system is made for crimping transversely belted terminals with wider distances between each other. The robust design allows to process wires with cross sections up to 25 mm<sup>2</sup>.

This applicator is designed with an indexed rotary head for reproducible, independent crimp height adjustment of both the wire and insulation. With the optional mechanical counter, it is easy to monitor the production run and control the wear parts.

### Range of Application

Schaefer crimping applicators are used in the series production of the cable processing industry.

### Examples of use

Crimping applicators to connect wires and terminals in multiple applications made for bench top crimp machines and also as equipment for semi or fully automated systems.

### Product Combination Possibilities

The applicator 23.100 can be used in Schaefer crimp machines EPS 6000, EPS 10000 and EPS 15000 and if designed accordingly also with Schaefer stripping modules.

## Technical Data

Crimping Applicator 23.100

<b>Supplies</b>	
Compressed Air	6 bar, dried and oilfree
<b>Processable Wire</b>	
Cross Sections	up to 25 mm <sup>2</sup>
<b>Processable Terminals</b>	
Material Thickness	up to 1,8 mm
Terminal Pitch	28 - 56 mm
Width of Carrier Strip incl. Belt	8 mm
Terminal Feeding	side feed from left
<b>Actuation</b>	
Feeding	pneumatical
Stroke	40 mm
Width of the Crimping Punch	38 mm
<b>Wire Crimp Height Adjustment</b>	
Increments	0,02 mm
Maximum	2 mm
<b>Insulation Crimp Height Adjustment</b>	
Increments	0,02 mm
Maximum	2 mm
<b>Temperature Range</b>	
Operation	15 °C - 40 °C
Storage	0 °C - 60 °C (rF < 80%)
<b>Dimensions &amp; Weight</b>	
L x W x H	360 x 150 x 160 mm [1]
L x W x H incl. Packing	540 x 270 x 200 mm [1]
Weight	9,2 kg [1]
Weight incl. Packing	11,2 kg [1]

[1] approximately in basic configuration

## Sales and Service for France



### Vario Technologies sarl

43, Rue Louis Robert

91100 Corbeil Essonnes

Phone: +33 970 44 55 26

Fax: +33 173 76 64 62

Email: [peter.sandkamp@vario-technologies.com](mailto:peter.sandkamp@vario-technologies.com)

URL: [www.vario-technologies.com](http://www.vario-technologies.com)

## Headquarters



### Schäfer Werkzeug- und Sondermaschinenbau GmbH

Dr.-Alfred-Weckesser-Str. 6

76669 Bad Schönborn

Phone: +49 7253 9421-0

Fax: +49 7253 9421-94

Email: [info@schaefer.biz](mailto:info@schaefer.biz)

URL: [www.schaefer.biz](http://www.schaefer.biz)

INNOVATIVE  
MASCHINE SOFTWARE



 WireStar 20

NEW